

Rosko

JULIEN

RO-FFG

Gas Floor Fryer

- | | |
|---------------------------------------|---------------------------------------|
| <input type="checkbox"/> RO-FFG-115-N | <input type="checkbox"/> RO-FFG-160-N |
| <input type="checkbox"/> RO-FFG-115-P | <input type="checkbox"/> RO-FFG-160-P |



RO-FFG-115

Construction

- Made of grade 430 stainless steel
- Welded stainless steel fry tank and chimney
- Two (2) fry tank sizes available
- 4" (102 mm) adjustable legs
- 1" (25 mm) NPT front drain with ball valve
- Two (2) fry baskets with coated handle and one (1) screen included

Operation

- Propane or natural gas power supply
- Multifunction gas control with integrated safety system and pressure regulator
- Power outputs from 115,000 to 160,000 BTU/H available depending on the model
- Thermostatic control of temperature from 200 °F to 400 °F (94 °C to 205 °C)
- Standing pilot light for quick ignition
- High limit thermal protection with automatic reset
- 1/2" (13 mm) NPT gas connector

Legal

- All models require a 3" (76 mm) clearance on both sides and a 6" (152 mm) clearance behind the unit if next to combustible material
- All models require commercial installation and are not intended for residential use
- One (1) year limited warranty on parts and labor
- Certified to ANSI Z83.11-2016/CSA 1.8-2016 standards

Option


- RO-ACC-FFG-115-BKT - Basket for Fryer RO-FFG-115
- RO-ACC-FFG-115-SCRN - Screen for Fryer RO-FFG-115
- RO-ACC-FFG-115-LID - Cover for Fryer RO-FFG-115
- RO-ACC-FFG-160-BKT - Basket for Fryer RO-FFG-160
- RO-ACC-FFG-160-SCRN - Screen for Fryer RO-FFG-160
- RO-ACC-FFG-160-LID - Cover for Fryer RO-FFG-160
- RO-ACC-FFG-4W - Set of 4 Wheels for Fryer RO-FFG
- RO-ACC-FFG-DBOARD - Removable Drip Tray for Fryer RO-FFG
- RO-ACC-FFG-ROD - Cleaning Rod for Fryer RO-FFG
- RO-ACC-FFG-UNI - Connecting Piece for Fryer RO-FFG
- RO-ACC-FFG-GUARD - Splash Guard for Fryer RO-FFG



955, rue Lachance
Québec, QC G1P 2H3
Canada

1 800 461-3377
www.rosko-julien.ca

*Due to the continuous development of the product,
specifications are subject to change without notice*

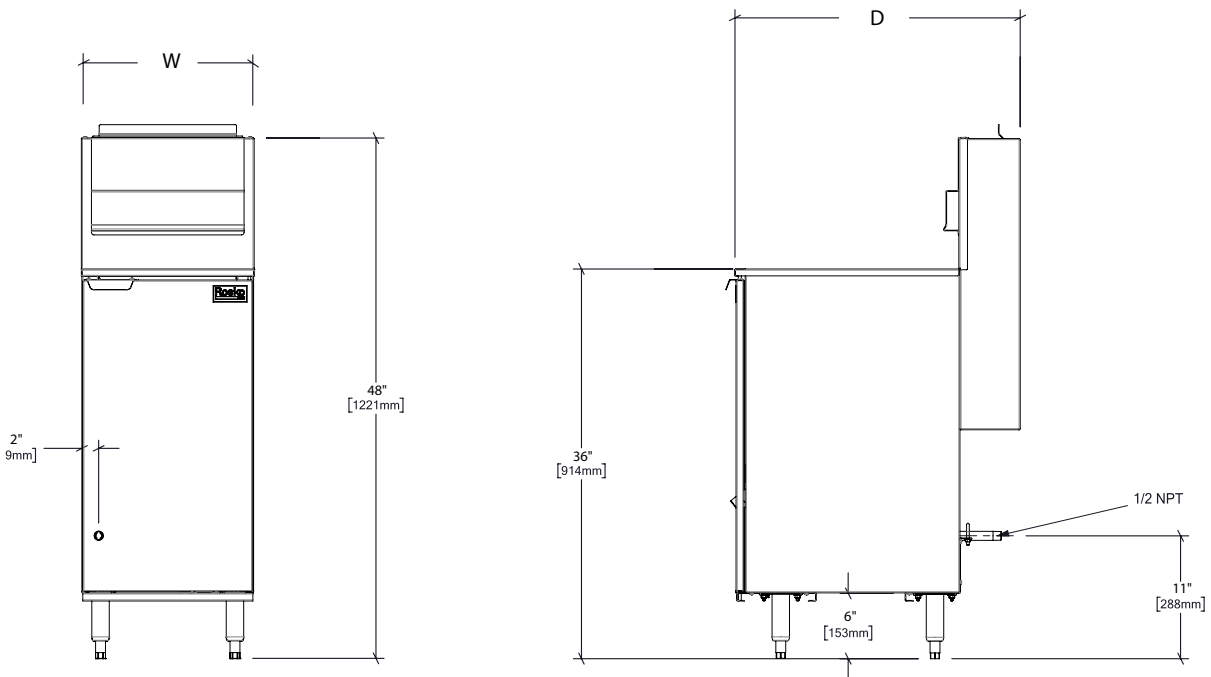

Models	Width (W)	Depth (D)	Total height	Oil capacity	Weight	Shipping dimensions (W x D x H)
RO-FFG-115-N	16" - 406 mm	26 ³ / ₈ " - 668 mm	48" - 1219 mm	42 lb - 23 L	125 lb - 57 kg	20 x 30 x 53" 508 x 762 x 1346 mm
RO-FFG-115-P						
RO-FFG-160-N	20" - 508 mm	28 ⁵ / ₈ " - 726 mm		60 lb - 34 L	168 lb - 76 kg	24 x 36 x 53" 610 x 914 x 1346 mm
RO-FFG-160-P						

Models	Total output	Number of burners	Gas type supply	Operating pressure
RO-FFG-115-N	115 000 BTU/H	3	Natural	3,5 po W.C.
RO-FFG-115-P			Propane	10 po W.C.
RO-FFG-160-N	160 000 BTU/H	4	Natural	3,5 po W.C.
RO-FFG-160-P			Propane	10 po W.C.